

Carver / Charisma



Technical Information 2014

Concorde
REISEMOBILE AUS LEIDENSCHAFT

Standard equipment

CHASSIS

	IVECO Daily 65C17	IVECO Eurocargo 75E18	IVECO Eurocargo 90E25	MAN TGL 8220
Insulated, sound proofed engine compartment cover	•	•	•	•
Turbo-Diesel engine with rear wheel drive and twin tyres, emission class Euro 5	•	•	•	•
Electronically regulated common rail direct injection	•	•	•	-
6 speed transmission	•	•	-	-
Automated 6 speed transmission (for MAN: EasyStart function, 6 cylinder engine with 12 speed automatic transmission)	option	option	•	•
Traction control system (TCS)	•	•	•	•
Air suspension on the rear axle with the function of "lifting and lowering"	option	•	•	•
Air suspension on the front and rear axle with the function of "lifting and lowering"	option	•	•	-
Tyres	225 / 75R16	225 / 75R17.5	235 / 75R17.5	235 / 75R17.5
Rear axle tyres with traction tread (M+S)	•	•	•	•
Disk brakes on the front and rear axle	•	•	•	•
Hydraulic braking system	•	-	-	-
Hydraulic pneumatic braking system	-	•	•	-
Pneumatic braking system	-	-	-	•
Electronically regulated anti-lock braking system (ABS)	•	•	•	•
Engine brake	-	•	•	•
Braking system with EVB-engine brake (cantilever brake)	-	-	-	•
Cruise control	•	•	•	•
Fully adequate spare wheel under the rear drop of the rear garage	•	•	•	•
3 phase alternator 14 V, 140 A or 28 V, 70 A	•	•	•	-
3 phase alternator 28 V, 80 A	-	-	-	•
Additional 3 phase alternator 14 V 80 A for charging the battery whilst driving	-	-	•	•
Fuel tank	90 l	115 l	180 l	180 l
Driver's cab air conditioning (MAN with automatic control)	•	•	•	•

Standard equipment

CHASSIS

	IVECO Daily 65C17	IVECO Eurocargo 75E18	IVECO Eurocargo 90E25	MAN TGL 8220
Daytime running light LED	•	•	•	•
Halogen headlamps with lens optic, full beam integrated into the bumper	•	-	-	-
LED headlamps, full beam integrated into the bumper (only Charisma)	•	•	•	•
Rear of the vehicle with LED taillights	•	•	•	•
Independent dashboard, incl. trays	•	•	•	•
Dashboard cover in leather upholstered with quilting seam	•	•	•	•
Steering wheel adjustable in height and inclination (in Iveco Daily only height is adjustable)	•	•	•	•
Hazard warning triangle, first aid kit, warning lights and wheel chock	•	•	•	•
Hubcaps in stainless steel	-	•	•	-

Standard equipment

BODY

CARVER

CHARISMA

Wraparound laminated glass windscreen with a metal coating which filters UV rays and reduces solar radiation, heated windscreen	•	•
Tempered glass sliding side windows with insulated glazing, tinted, with pleated shade (also as sun protection whilst driving) and fly screen, frames are thermally separated	•	•
Double glazed, tinted plastic window in the living space, fold out or sliding, with pleated shade and fly screen	•	•
Stable step integrated in the front bumper for windscreen cleaning	•	•
Front bumper as additional crash element to strengthen the passive safety of the occupants	•	•
Central tow eye in the front bumper and crash elements integrated (without additional towing support)	•	•
Insulating shade for windscreen with electric control, partly heated when closed	•	•
Highly stable durable aluminium composite construction Solidtherm	•	•
Cold spots free, fully insulated wall connection technique through highly compacted polyurethane foam	•	•
Completely insulated driver's cab	•	•
Radiator between insulating shade and windscreen	•	•
40 mm wall thickness, of this 38 mm closed cell RTM hard foam	•	•
Walls, roof and floors internally and externally in high-quality aluminium, in a sandwich design	•	•
Outer sheet smooth, white stove-enameled	•	•
Completely safe to walk on roof	•	•
Aluminium roof profile ledges with rain water collection to reduce staining to the side walls	•	•
Front section made from highly stable corrosion and rotting free fiberglass composite material	•	•
Side skirting panel made from highly stable corrosion and rotting free fiberglass composite material	•	•
Back wall and bumper in a fiberglass sandwich with a polyurethane foam core	•	•
Heated double floor with approx. 470 mm (Charisma only Daily) accessible through the side flaps	•	•
Heated double floor with approx. 350 mm (not Daily) accessible through the side flaps	-	•

Standard equipment

BODY

	CARVER	CHARISMA
Heavy duty castors at the rear	•	•
Storage space flaps with die-cast aluminum hinges and easy-care, high-quality needled felting on the inside, frames thermally separated	•	•
Sandwich under and in-between floor with 40 mm or 30 mm thick RTM foam respectively, total floor insulation 70 mm	•	•
Rear axle wheel arches made in fully insulated sandwich construction	•	•
Lit rear garage with garage doors right and left, rigging system and 230 V power socket (not Charisma 920 G)	•	•
Internal, lighted entrance step, heated	•	•
External, electronic retractable entrance step with safety circuit and lighting	•	•
"Economy" entrance door with radio remote control and key emergency switch	•	-
"Security Plus" entrance door with number combination security lock and key emergency switch, door security "Interstop"	option	•
Fly screen for entrance door	•	•
Exterior light with security switch (automatically switches off when the engine starts)	•	•
Pilot seats with integrated seat belt system and arm rests	•	•
Large shoe compartment in the entrance area for several pairs of shoes	•	•
Front roll-blind for privacy (adjustable privacy shield from the bottom to the top)	option	•
Easy-clean, hard-wearing, strengthened PVC-coated garage floor	•	•
Coach wiper system	•	•
Coach exterior side mirrors (short) wide-angle, electronically heatable and adjustable	•	-
Coach exterior side mirrors (long) wide-angle, electronically heatable and adjustable	option	•

Standard equipment

LIVING SPACE / SLEEPING SPACE

CARVER

CHARISMA

Furniture flaps and doors:		
• European Teak (both sides veneered)	-	•
• European Wenge (both sides veneered)	-	optional
• Cherry Fineline (plastic coating on both sides)	•	-
• Argento Oliva (plastic coating on both sides)	•	-
Level living space floor from the dashboard to the rear bed	•	•
Coloured, coordinating, high-quality textile coverings for walls and ceiling	•	•
Commercial floor covering Soft-walk. Colour: antia anthracite	•	•
Living room suite ergonomically formed high-quality microfibre upholstery with zips (body) incl. driver's cab seats	•	•
High-quality roman blinds	•	•
Sofa-bed left with seatbelts	•	•
Interior lighting in wardrobe	•	•
Rear bed with bed base, adjustable head section and comfortable cold foam mattress	Option	•
Lighting around Midi-Heki skylight, fly-screen and pleated shade in living space	•	-
Double glazed wrap-around skylight, fly-screen and pleated shade in living space	Option	•
Mini-Heki with fly-screen and pleated shade in sleeping area	•	•
High-quality dining table	•	•
Adjustable central table leg (not in bar version and Charisma 900 L)	-	•
TV sideboard in entrance area	•	•
Entrance cabinet with solid shelves incl. a collection of suitable glasses and LED lighting	•	•
Indirect lighting canopy with LED spotlights and concealed lighting	•	•
Stable metal hand grip to ease entry	•	•
12 V socket and 230 V sockets	•	•
Front wall units over the full width of the windscreen	•	•

Standard equipment

RAISER BED (OPTIONAL)

	CARVER	CHARISMA
Lying surface (in mm)	2000 x 1300	2000 x 1300
Height above bed (in mm)	860	860
Comfortable cold foam mattress with bed base	•	•
Mini-Heki with fly-screen and pleated shade	•	•
Driver's cab curtains	•	•

KITCHEN

Kitchen area with splash guard	•	•
Solid work surface in light-weight design with stainless steel sink. Colour: sanded mirage	•	•
Stainless steel hob, three rings with automatic ignition and glass cover	•	•
Chrome single lever mixer tap with pull-out shower head	•	•
160 l refrigerator with separate freezer box, AES (automatic energy selection 12 V / 230 V / gas)	•	•
Drawers with Servo-Soft movement	•	•
Integrated cutlery drawer	•	•
Roof ventilator	•	•
Lit canopy with LED spotlights and concealed lighting	•	•
LED spotlights under the wall cupboards	•	•
Integrated refuse system in lower kitchen cupboard	•	•
2 x 230 V socket	•	•
Pull out cupboard (depends on the model) to store kitchen utensils	-	•

Standard equipment

BATHROOM / TOILET

CARVER

CHARISMA

High-quality chrome designer bathroom fittings on washstand	-	•
Plexicor bathroom worktop with a seamlessly moulded Wash basin. Colour: arctic white	•	-
Plexicor bathroom worktop with a seamlessly moulded wash basin. Colour: sanded cream	-	•
Washstand with single lever chrome mixer tap	•	-
Separate shower with acrylic-glass doors (in standard bathroom) and real glass doors (in premium bathroom) incl. removable clothes rail	•	•
Shower fittings with wall bar and hight adjustable shower head	•	•
Cassette toilet with porcelain bowel	•	-
Porcelain toilet with approx. 230 l fixed tank (approx. 160 l in Charisma 920 G)	option	•
Bathroom fittings with toilet paper holder, toilet brush, liquid soap dispenser, hand towel hook and holder, toothbrush glass	•	•
Bathroom window	-	•
Mini-Heki with fly-screen and pleated shade	•	•
LED spotlight lighting	•	•
Interior lighting wardrobe, twin wardrobe in Charisma	•	•
Full length mirror	•	•
Spacious mirrored cabinet with shelves	•	•
230 V socket	•	•

Standard equipment

WATER / GAS / HEATING

	CARVER	CHARISMA
Central disposal through sewage and waste water tank	-	•
Gas bottle storage area space for 2 x 11 kg gas canisters	•	•
Gas controller "Duocontrol" with crash sensor and automatic bottle changing	•	•
Sink siphon	•	•
Fresh and waste water tank, each approx. 230 l with heated double floor	•	-
Freshwater tank approx. 380 l and waste water tank approx. 310 l (except Charisma 920 G: waste water tank approx. 290 l)	-	•
Convenient waste water tank emptying with drain cock in the heated double floor	•	•
External cleaning opening on all tanks, accessible from the living area	•	•
Cleaning port with a click-fit system for convenient cleaning of the waste water tanks (no need for a second pump)	-	•
High pressure cleaning nozzle for cleaning the waste water tank in addition to the fixed tank's cleaning port	-	•
Waste water drainage hose with fast fastenings and closing cap	•	•
Automatically functioning central water-pressure pump with filter system	•	•
Alde hotwater-gas-centralheating 5500 W with a thermostat and timer, electrical heating cartridge 230 V, 3000 W backflow lock with integrated hot water boiler to maintain all tapping points	•	•
Heating circuit temperature adjustable sleeping area / garage	option	•
2 zoned underfloor heating, separately adjustable (living space, bathroom)	option	•
3 zoned space heating, separately adjustable (living space, bathroom, sleeping area)	-	•
Heated towel rack in bathroom with thermostat	•	•
Engine heat exchanger which uses the motor's cooling water to heat the living area	•	•

Standard equipment

ELECTRIC / TV /RADIO

CARVER

CHARISMA

Gel battery 1 x 165 Ah (not Charisma 920 G)	•	•
Gel battery 2 x 140 Ah (not Charisma 920 G)	-	•
Battery surveillance system with protection against exhaustive discharge	•	•
230 V CEE connection in storage space with cable routing through the vehicle's floor	•	•
RCD automatic personal protection	•	•
Automatic charging with electronic control and battery temperature sensor, maximal charge current 25 A	•	•
Inverter from 12 V to 230 V Sinus 350 W with mains priority circuit	•	•
Disconnection of the electrical system by under-voltage with automatic restarting	•	•
230 V socket in garage (not G-model)	•	•
Double DIN radio CD/DVD and MP3 and USB ports	•	•
Speaker 2 way system	•	-
Speaker 3 way system	-	•
LED lighting in interior	•	•
Service friendly access to electrical system with grate-cover (not G-model) in the rear garage (G-model exterior right storage compartment)	•	•
During engine stoppage refrigerator automatic changes from 12 V to gas / 230 V (land connection – 15 min delay)	•	•
Automatic charging of the living space and vehicle's battery, charge is maintained by external power source as well as whilst driving	•	•
Circuit breaker for living space batteries	•	•
Automatic disconnection and connection of leisure and vehicle batteries	•	•

Standard equipment

ELECTRICAL SYSTEM

CARVER

CHARISMA

Highly modern microprocessor-controlled electrical system with BUS-technology (Binary Unit System)

•

•

Centralized control panel with 7" touchscreen colour-display

•

•

Master switch for all users

•

•

Buttons for turning on and off the following devices:

• Panel

•

•

• Lighting

•

•

• Water pump

•

•

• Heating

•

•

LCD display for monitoring:

• Freshwater tank (fill level in %)

•

•

• Waste water tank (fill level in %)

•

•

• Battery voltage of the vehicle and living space battery

•

•

• Exterior and interior temperature

•

•

• Exterior current supply

•

•

• Gas fill level (only in connection with gas tank)

•

•

• Battery parallel circuit

•

•

• Date and time with alarm

•

•

Alarm equipment for:

• Wastewater tank full

•

•

• Freshwater tank empty

•

•

• Faecal tank full

option

•

• Battery under voltage

•

•

• Reserve gas canister in use

•

•

• Lowered step

•

•

Battery computer:

• Body battery capacity indicator

•




•

• Charge and discharge current

•

•

Technical Information

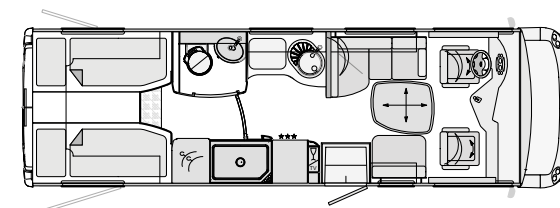
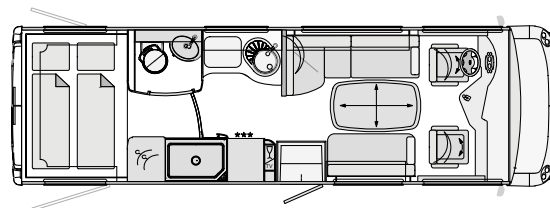
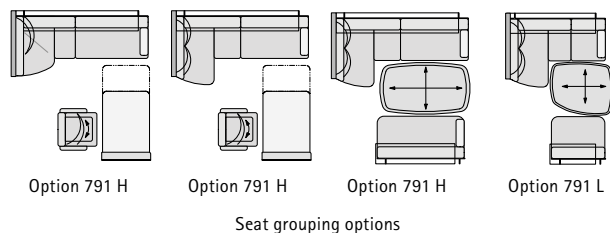


CARVER 791 H

CARVER 791 L

Basic vehicle	Iveco Daily	Iveco Daily
Chassis type	65C17	65C17
Engine	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.0 l
Engine power	125 kW (170 bhp)	125 kW (170 bhp)
Torque	400 Nm	400 Nm
Total length (mm)	8160	8160
Total width (mm)	2380	2380
Total height (mm)	3510	3510
Wheel base (mm)	4350	4350
Technical permissible total mass (kg)	6500	6500
Mass in roadworthy condition (kg)	4990	4990
Vehicle load capacity (kg)	1510	1510
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500 / 2500
Seats with three point belt	3 / 4 / 5	3 / 4
Left seating group (mm)	1985 / 890	1485 / 890
Right seating (mm)	1295 / 640	795 / 640
Rear bed (mm)	2080 / 1480	2 x 2000 / 845
Raised bed measurements (optional, mm)	2000 / 1300	2000 / 1300
Height above raised bed (mm)	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 800	1250 / 800

For further information about the measurements and weight specifications see page 18.

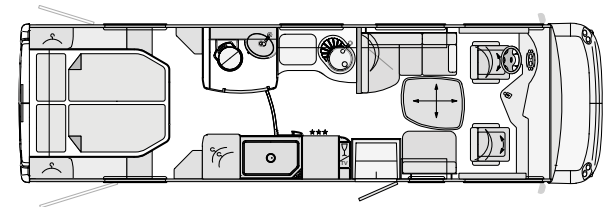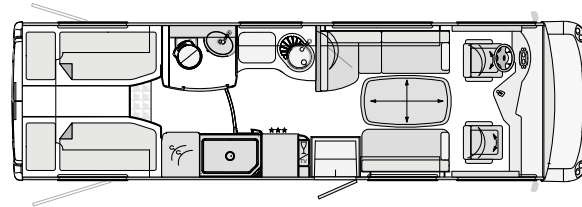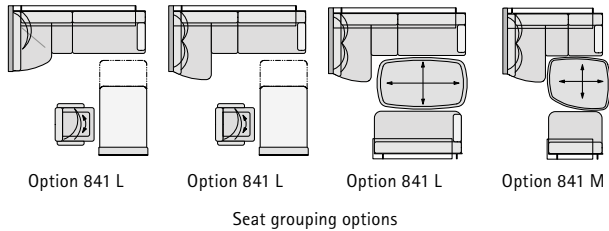


CARVER 841 L


CARVER 841 M

Basic vehicle	Iveco Daily	Iveco Daily
Chassis type	65C17	65C17
Engine	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.0 l
Engine power	125 kW (170 bhp)	125 kW (170 bhp)
Torque	400 Nm	400 Nm
Total height (mm)	8660	8660
Total width (mm)	2380	2380
Total height (mm)	3510	3510
Wheel base (mm)	4750	4750
Technical permissible total mass (kg)	6500	6500
Mass in roadworthy condition (kg)	5120	5120
Vehicle load capacity (kg)	1380	1380
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500 / 2500
Seats with three point belt	3 / 4 / 5	3 / 4
Left seating group (mm)	1985 / 890	1485 / 890
Right seating (mm)	1295 / 640	795 / 640
Rear bed (mm)	2 x 2000 / 845	2 x 2000 / 845
Raised bed measurements (optional, mm)	1970 / 1340	1970 / 1340
Height above raised bed (mm)	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 800	1250 / 800
Left garage door H / W (mm) clearance dimensions	1250 / 800	1250 / 800

Technical Information

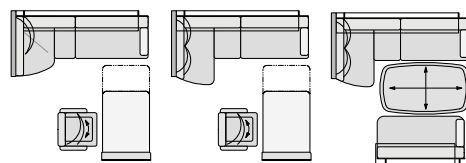

Seat grouping options

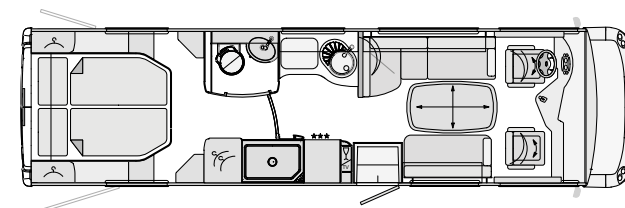

CARVER 891 M

Basic vehicle	Iveco Daily
Chassis type	65C17
Engine	4 cylinder
Engine displacement	3.0 l
Engine power	125 kW (170 bhp)
Torque	400 Nm
Total length (mm)	9160
Total width (mm)	2380
Total height (mm)	3510
Wheel base (mm)	4900
Technical permissible total mass (kg)	6500
Mass in roadworthy condition (kg)	5250
Vehicle load capacity (kg)	1250
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500
Seats with three point belt	3 / 4 / 5
Left seating group (mm)	1985 / 890
Right seating (mm)	1295 / 640
Rear bed (mm)	2000 / 1570
Raised bed measurements (optional, mm)	2000 / 1300
Height above raised bed (mm)	860
Right garage door H / W (mm) clearance dimensions	1250 / 800
Left garage door H / W (mm) clearance dimensions	1250 / 800

For further information about the measurements and weight specifications see page 18.

Chassis optional equipment

CHASSIS IVECO DAILY

EXCESS WEIGHT
in kg

Chassis packet¹ 65C

Laden mass 6700 kg permissible total mass

40

Differential lock for rear axle

Original Iveco air suspension on the rear axle with the function of "lifting and lowering"

Chassis packet¹ 70C

Laden mass 7200 kg permissible total mass

40

Differential lock for rear axle

Original Iveco air suspension on the rear axle with the function of "lifting and lowering" (only connected to chassis version 70C)

Laden mass 6700 kg (chassis version 65C)

0

Laden mass 7200 kg (chassis version 70C)

0

Chassis version Iveco Daily70C (7000 kg permissible total mass)

20

Tow bar with towable mass 3500 kg (Agile 2500 kg) (only available with factory installation)

29

Tow bar with removable ball head 2500 kg

33

Iveco Daily C21 Euro 5, engine displacement 3.0 l, 151 kW (205 HS), torque 470 Nm, only available with manual transmission

30

Automatic 6 speed manual transmission Agile incl. hill climb assistance (towable mass 2500 kg)

20

Luxury driver's cab suspension seats, air sprung with lumbar support and heated seats (only with air sprung seats)

35

Hydraulic supports with automatic levelling

100

Stainless steel hubcaps

5

Alloy wheels 16" front axle with wheel spacer / rear axle hubcaps (spare wheel with steel rim)

-4

Concorde steering wheel in leather

1

Concorde steering wheel in leather (removable)

2

Concorde multi-functional steering wheel in leather with access to radio or optional navigations systems

3

Original Iveco air suspension on the rear axle with the function of "lifting and lowering" (not with luxury driver's cab seats)

25

Air suspension on the rear axle with the function of "lifting and lowering"

25

Air suspension in the front and rear axle, 4 channel system with "Auto Level" function (only with alloy wheels)

81

Fuel tank 120 l

35

Differential lock for rear axle

15

¹ Not available with 4 channel air suspension and luxury driver's cab suspension seats.

Body optional equipment

BODY

EXCESS WEIGHT
in kg

Body door "Security Plus" with number combination lock and Interstop (gas pressure absorbers)	0
Body door "Security" without number combination lock, remote control Interstop (gas pressure absorbers) instead	0
Coach wing mirrors, long, driver's side	8
Coach wing mirrors, long, passenger's side	8
Passenger's side garage flap 1250 x 1150 mm (instead of series door)	6
Rear garage floor with serrated aluminum sheet cover	20
Central locking system for storage space flaps (without the skirting panel flaps and the gas box door)	5
Side wall awning 6.0 m, with crank	62
Side wall awning 6.0 m, electric	66
Electrical sun blind in driver's cab for the front area	5

LIVING SPACE / SLEEPING AREA

Bar version (for 791 H, 841 L and 891 M)	46
CL-Lounge (4 people)	24
CL-Lounge with bar version (5 people) (for 791 H, 841 L and 891 M)	70
Rear bed with bed base	6
Raised bed with mechanical operation, bed base, instead of front wall unit	45
Raised bed with electrical operation, bed base, instead of front wall unit	53
Midi-Heki instead of Mini-Heki (sleeping area)	6
Wrap-around sky light instead of Midi-Heki (living space)	13
Wrap-around sky light instead of Mini-Heki (sleeping area)	19
Lowerable table with upholstered chairs (not available with bar version)	8
Front roll-blind for privacy (adjustable privacy shield from the bottom to the top)	4

KITCHEN

Solid kitchen worktop in beige (sanded sahara) with a seamlessly moulded wash basin, chrome railing and towel rail	15
Refrigerator 190 I instead of 160 I series refrigerator	6
Refrigerator 190 I / cooker combination with grill instead of 160 I series refrigerator	23

Body optional equipment

ELECTRIC

EXCESS WEIGHT
in kg

Electric power packet 1

1 x gel battery 165 Ah additional (total then 2 batteries) combi-charger 100 A, Sinus inverter from 12 V to 230 V,
4000 W top and 2000 W continuous power with network compensator

68

Electric power packet 2

2 x gel battery 165 Ah additional (total then 3 batteries) combi-charger 100 A, Sinus inverter from 12 V to 230 V,
5000 W top and 2500 W continuous power with network compensator

125

Alarm system with surveillance of the inner rooms, the garage flaps as well as the living space door

3

Gas generator 2600 W built in (only with gas tank)

50

Double reverse camera with shutter (screen above series radio)

4

Solar panels with approx 120 W maximal power

15

Solar panels with approx 2 x 120 W maximal power

30

TV / RADIO / TELEPHONE

Satellite TV with 85 cm dish, fully automatic tuning, multiple user facilities through TWIN-LNB,
Port for second receiver with 12 V / 230 V and antenna socket in sleeping area,
sound reproduction possible over radio (total vehicle height plus approx 100 mm)

Satellite TV set 1 with LED flat screen 24" in entrance area

38

Satellite TV set 3 with LED flat screen 24" in wall unit above the windscreen, electronically lowerable (not with raised bed)

45

Internet satellite TV set with LED flat screen 24" in entrance area, set with TV reception, GPS SKEW and internet access

38

Navigations system (with truck software and 7.0" touchscreen, integrated radio with DVD, CD and MP3 playback,

Speaker phone for telephones with Bluetooth) and double reverse camera with shutter

4

Combination 230 V / 12 V / antenna / socket with cable routing in the floor. Position: in the external storage space on the left next to the body door
(for optional TV external connection) (satellite exit)

1

LED flat screen 22" for rear sleeping area with integrated TV tuner (not with raised bed)

15

DVB-T antenna for reception of terrestrial digital TV

2

Sound system with 2 way speaker in driver's cab, 2 wide band speakers in the living space, sub-woofer, sound-processor

25

Body optional equipment

WATER / GAS / HEATING / BATHROOM

	EXCESS WEIGHT in kg
Exterior shower in the garage (driver's side)	2
Diesel pre heating "Motor Caravan" with comfortable continuous heating function (5200 W) incl. timer switch	10
Freshwater tank approx. 320 l (instead of 230 l)	8
Fresh and waste water tank, each approx. 320 l (instead of 230 l)	16
2 zoned underfloor heating, separately controlled (living space, bathroom)	10
Living space monitor gas alarm (carbon monoxide, propane, butane, anaesthetising gas)	2
Gas tank approx 120 l with remote gas switch, crash sensor and fill level indicator on the control panel display, incl. skirting panel flaps	104
Exterior gas socket on the passenger's side (gas withdrawal)	1
Heating circuit temperature adjustable in sleeping area / garage	7
Roof air conditioning 2400 W with heating element 1700 W (vehicle total height plus 130 mm)	34
Porcelain toilet with approx. 230 l fixed tank	28
Additional cassette toilet with retaining basin	3
SOG toilet ventilation over the roof	1

UPHOLSTERY FABRIC / LEATHER / CARPET

Microfibre upholstery sandstone, smooth	Series	0
Microfibre upholstery cappuccino, smooth	Series	0
Part leather/microfibre mother-of-pearl upholstery, smooth		0
Part leather/microfibre stone grey upholstery, smooth		0
Leather upholstery sandstone, smooth		25
Leather upholstery mother-of-pearl, smooth		25
Leather upholstery tortora, smooth		25
Leather upholstery stone grey, smooth		25
Concorde collection: 2 x small cushion, 1 x large cushion, 2 x cosy blanket		8
Commercial floor covering Soft-walk. Colour: dark brown	at no extra cost	0
Linked and removable living space carpet. Colour: cream		10
Linked and removable living space carpet. Colour: mole		10


Concorde exclusively uses high-quality fabric and leather with a special stain resistance coating.

Mass in roadworthy condition comprises of: Driver (75 kg) filled fuel tank, 100 l fresh water in Iveco Daily, Iveco Eurocargo and MAN TGL chassis, 1 x filled 11 kg steel gas cylinder, tools and spare wheel.
Through the installation of standard equipment and fixtures, unladen weight and measurements may alter. All mass and weight information is correct at the time of printing. deviation of +/- 5% is possible and permissible.

Sectional drawing


THE CABIN CONSTRUCTION OF CONCORDE CARVER

In campervan construction, Concorde stands for perfect insulation and outstanding stability. This is chiefly down to the lack of thermal loss, completely sealed solid-therm cabin construction with polyurethane ridged foam ledges as well as the insulation of the side walls with 38 millimeter strong RTM foam. And as if that weren't enough: Also the under and in-between floors are finished in a sandwich type construction and filled with altogether 70 millimetres of insulation. The side skirting panels, bumpers as well as the front and rear parts are made from highly stable and nonetheless elastic fiberglass composite material. The very glossy and completely flush wall surfaces made from Aluminium sandwich construction make for a car-like impression. Aluminium roof profile ledges with rainwater flow channels reduce the telling sidewall staining. 10-year water ingress warranty on the body against ingress of moisture from the outside with annual inspection in accordance with the Concorde warranty conditions.

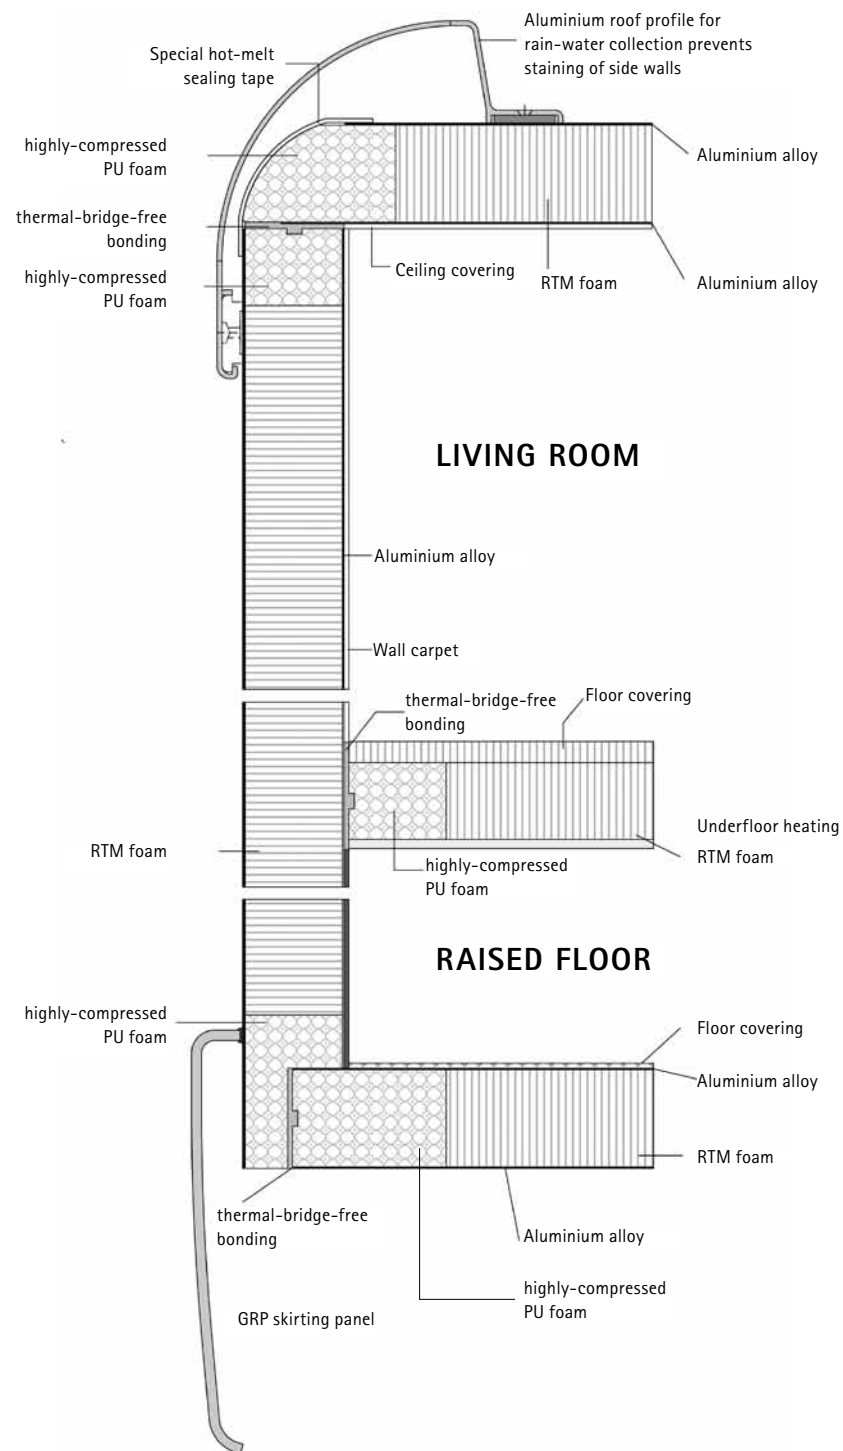

Technical Information


CHARISMA 850 L

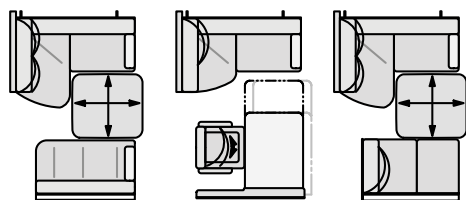

CL lounge

Bar version


CL lounge
with 5th seat

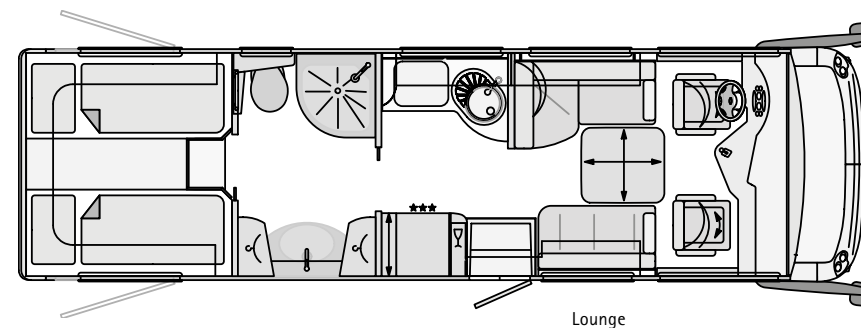


Basic vehicle	Iveco Daily	Iveco Eurocargo	MAN TGL
Chassis type	70C17	75E18	8.220
Engine	4 Cylinder	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.9 l	4.6 l
Engine power	125 kW (170 bhp)	132 kW (180 bhp)	162 kW (220 bhp)
Torque	400 Nm	570 Nm	850 Nm
Total height (mm)	8590	8750	8750
Total width (mm)	2400	2400	2400
Total height (mm)	3540	3460	3450
Wheel base (mm)	4750	4185	4200
Technical permissible total mass (kg)	7000	7490	8800
Mass in roadworthy condition (kg)	5590	6600	6780
Vehicle load capacity (kg)	1410	890	2020
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500	3500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 4 / 4 / 5	3 / 4 / 4 / 5	3 / 4 / 4 / 5
Left seating group (mm)	1450 / 890	1450 / 890	1450 / 890
Right seating group (mm)	1170 / 650	1170 / 650	1170 / 650
Rear bed (mm)	2 x 2000 / 845	2 x 2000 / 845	2 x 2000 / 845
Raised bed measurements (optional, mm)	1980 / 1300	1980 / 1300	1980 / 1300
Height above raised bed (mm)	860	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150

For further information about the measurements and weight specifications see page 30.


CHARISMA 900 L




Bar version




Bar version
with CL lounge



CL lounge long



CL lounge long
with 5th seat

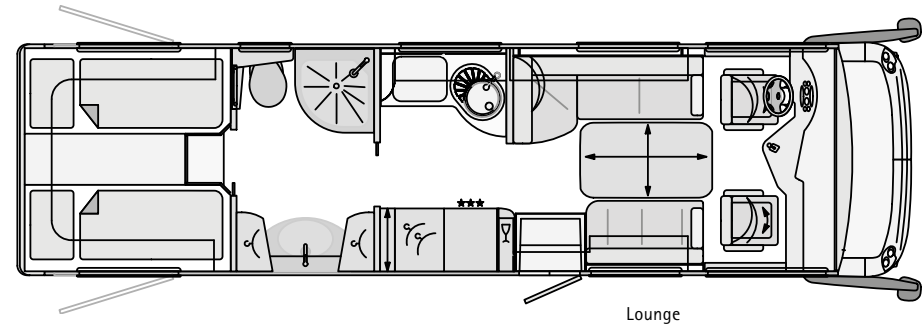


Lounge

Basic vehicle	Iveco Daily	Iveco Eurocargo	MAN TGL
Chassis type	70C17	75E18	8.220
Engine	4 Cylinder	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.9 l	4.6 l
Engine power	125 kW (170 bhp)	132 kW (180 bhp)	162 kW (220 bhp)
Torque	400 Nm	570 Nm	850 Nm
Total height (mm)	9090	9250	9250
Total width (mm)	2400	2400	2400
Total height (mm)	3540	3460	3450
Wheel base (mm)	4900	4455	4500
Technical permissible total mass (kg)	7000	7490	8800
Mass in roadworthy condition (kg)	5730	6740	6920
Vehicle load capacity (kg)	1270	750	1880
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500	3500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 4 / 4 / 5	3 / 4 / 4 / 5	3 / 4 / 4 / 5
Left seating group (mm)	1450 / 890	1450 / 890	1450 / 890
Right seating group (mm)	1170 / 650	1170 / 650	1170 / 650
Rear bed (mm)	2 x 2000 / 845	2 x 2000 / 845	2 x 2000 / 845
Raised bed measurements (optional, mm)	2000 / 1300	2000 / 1300	2000 / 1300
Height above raised bed (mm)	860	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150

For further information about the measurements and weight specifications see page 30.

Technical Information


CHARISMA 900 LS

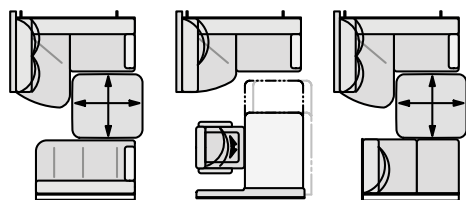

CL lounge

Bar version

CL lounge
with 5th seat


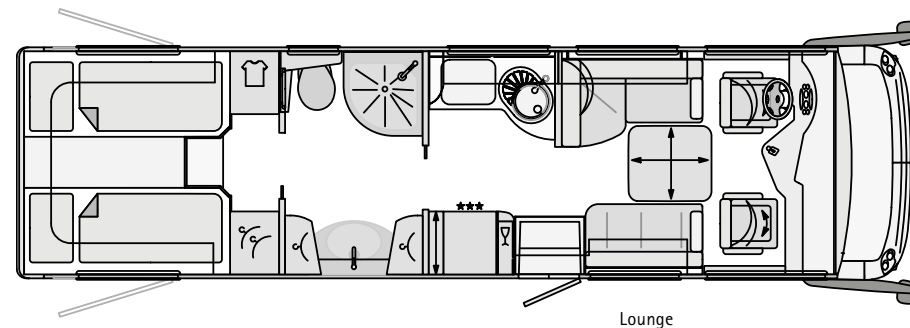


Lounge

Basic vehicle	Iveco Daily	Iveco Eurocargo	MAN TGL
Chassis type	70C17	75E18	8.220
Engine	4 Cylinder	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.9 l	4.6 l
Engine power	125 kW (170 bhp)	132 kW (180 bhp)	162 kW (220 bhp)
Torque	400 Nm	570 Nm	850 Nm
Total height (mm)	9090	9250	9250
Total width (mm)	2400	2400	2400
Total height (mm)	3540	3460	3450
Wheel base (mm)	4900	4455	4500
Technical permissible total mass (kg)	7000	7490	8800
Mass in roadworthy condition (kg)	5730	6740	6920
Vehicle load capacity (kg)	1270	750	1880
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500	3500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 4 / 4 / 5	3 / 4 / 4 / 5	3 / 4 / 4 / 5
Left seating group (mm)	1450 / 890	1450 / 890	1450 / 890
Right seating group (mm)	1170 / 650	1170 / 650	1170 / 650
Raised bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Raised bed measurements (optional, mm)	2000 / 1300	2000 / 1300	2000 / 1300
Height above raised bed (mm)	860	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150

For further information about the measurements and weight specifications see page 30.

CHARISMA 900 M

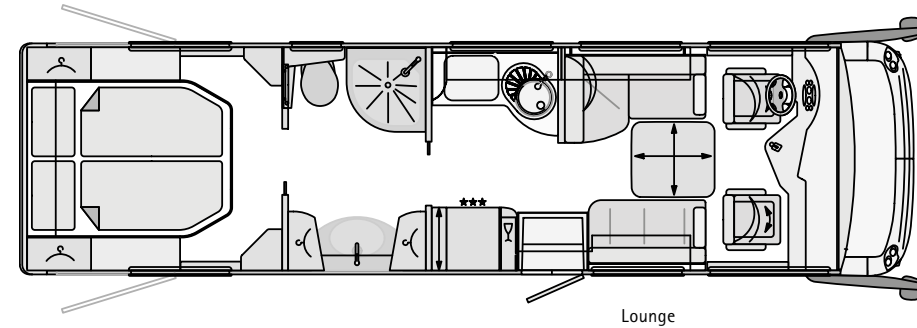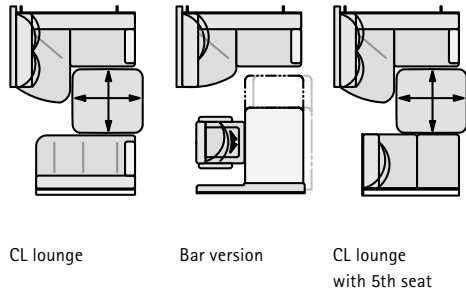


Basic vehicle	Iveco Daily	Iveco Eurocargo	MAN TGL
Chassis type	70C17	75E18	8.220
Engine	4 Cylinder	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.9 l	4.6 l
Engine power	125 kW (170 bhp)	132 kW (180 bhp)	162 kW (220 bhp)
Torque	400 Nm	570 Nm	850 Nm
Total height (mm)	9090	9250	9250
Total width (mm)	2400	2400	2400
Total height (mm)	3540	3460	3450
Wheel base (mm)	4900	4455	4500
Technical permissible total mass (kg)	7000	7490	8800
Mass in roadworthy condition (kg)	5730	6740	6920
Vehicle load capacity (kg)	1270	750	1880
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500	3500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 4 / 4 / 5	3 / 4 / 4 / 5	3 / 4 / 4 / 5
Left seating group (mm)	1450 / 890	1450 / 890	1450 / 890
Right seating group (mm)	1170 / 650	1170 / 650	1170 / 650
Raised bed measurements (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Raised bed measurements (optional, mm)	2000 / 1300	2000 / 1300	2000 / 1300
Height above raised bed (mm)	860	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150

For further information about the measurements and weight specifications see page 30.

Technical Information


CHARISMA 905 L

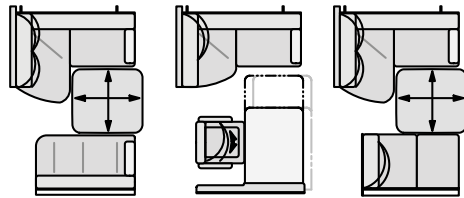

CL lounge

Bar version

CL lounge
with 5th seat

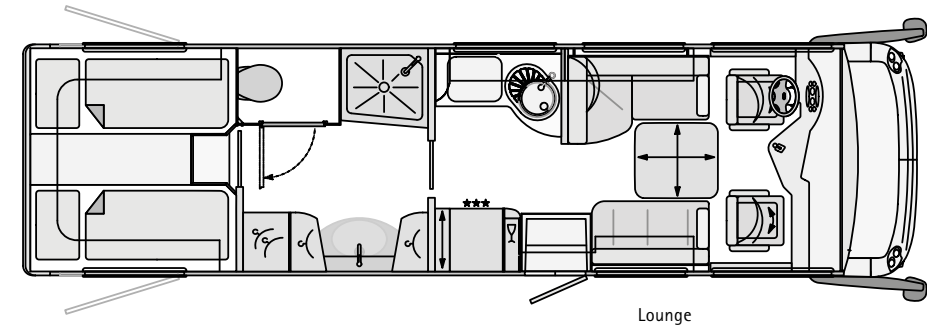


Lounge

Basic vehicle	Iveco Daily	Iveco Eurocargo	MAN TGL
Chassis type	70C17	75E18	8.220
Engine	4 Cylinder	4 Cylinder	4 Cylinder
Engine displacement	3.0 l	3.9 l	4.6 l
Engine power	125 kW (170 bhp)	132 kW (180 bhp)	162 kW (220 bhp)
Torque	400 Nm	570 Nm	850 Nm
Total height (mm)	9090	9250	9250
Total width (mm)	2400	2400	2400
Total height (mm)	3540	3460	3450
Wheel base (mm)	4900	4455	4500
Technical permissible total mass (kg)	7000	7490	8800
Mass in roadworthy condition (kg)	5730	6740	6920
Vehicle load capacity (kg)	1270	750	1880
Towing capacity (braked) manual / automatic transmission (kg)	3500 / 2500	3500	3500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 4 / 4 / 5	3 / 4 / 4 / 5	3 / 4 / 4 / 5
Left seating group (mm)	1450 / 890	1450 / 890	1450 / 890
Right seating group (mm)	1170 / 650	1170 / 650	1170 / 650
Raised bed (mm)	2000 / 1570	2000 / 1570	2000 / 1570
Raised bed measurements (optional, mm)	2000 / 1300	2000 / 1300	2000 / 1300
Height above raised bed (mm)	860	860	860
Right garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150
Left garage door H / W (mm) clearance dimensions	1250 / 1150	1250 / 1150	1250 / 1150

For further information about the measurements and weight specifications see page 30.


CHARISMA 920 G

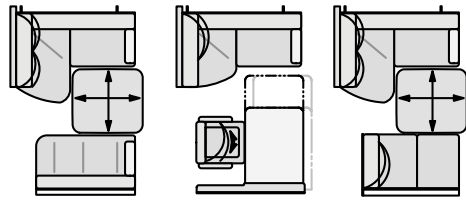


CL lounge

Bar version

CL lounge
with 5th seat



Smart garage

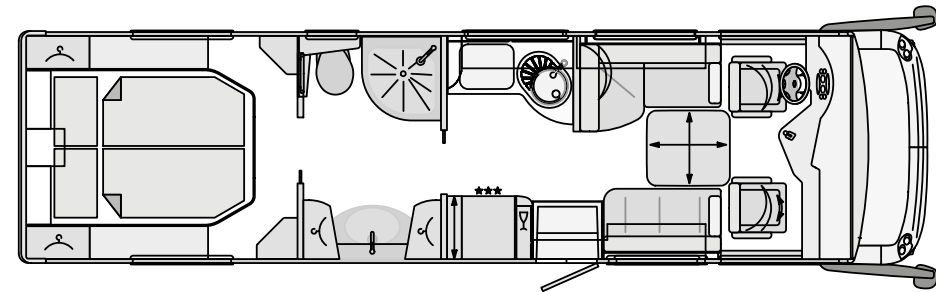

Lounge

Basic vehicle	Iveco Daily
Chassis type	70C17
Engine	4 Cylinder
Engine displacement	3.0 l
Engine power	125 kW (170 bhp)
Torque	400 Nm
Total length (mm)	9240
Total width (mm)	2400
Total height (mm)	3470
Wheel base (mm)	5000
Technical permissible total mass (kg)*	7490
Mass in roadworthy condition (kg)	5890
Vehicle load capacity (kg)	1600
Towable load (braked) (kg)	2500
Seats with 3 point seat belt in the lounge / CL lounge / bar version / CL + 5th seat	3 / 3 / 4 / 5
Left seating group (mm)	1450 / 890
Right seating (mm)	1170 / 650
Rear bed (mm)	2000 / 1570
Raised bed measurements (optional, mm)	2000 / 1300
Height above raised bed (mm) clearance dimensions	860
Rear flap H / W (mm) clearance dimensions	1500 / 1650

* incl. air suspension on the rear axle with the function of "lifting and lowering" For further information about the measurements and weight specifications see page 30.

Chassis optional equipment

CHASSIS IVECO DAILY

EXCESS WEIGHT
in kg

Chassis packet¹ (not for 920 G)	
Laden mass 7490 kg permissible total mass	40
Differential lock for rear axle	
Original Iveco air suspension on the rear axle with the function of "lifting and lowering"	
Laden mass 7490 kg permissible total mass (max. towable load 3000 kg, Agile 2500 kg)	0
Tow bar with towable mass 3500 kg (Agile 2500 kg) (only available with factory installation)	29
Tow bar with removable ball head (max. towable load 2500 kg)	33
Stainless steel hubcaps	5
Automatic 6 speed manual transmission Agile incl. hill climb assistance (towable mass 2500 kg)	20
Iveco Daily C21 Euro 5, engine displacement 3.0 l, 151 kW (205 HS), torque 470 Nm, only available with manual transmission	30
Bi-LED headlamps in the front, fog lights and bending lights integrated under the bumper incl. Daytime running lights LED	5
Differential lock for rear axle	15
Luxury driver's cab suspension seats, air sprung with lumbar support and heated seats (only with air spring)	35
Hydraulic supports with automatic levelling	100
Light alloy wheels 16" on the front axle with wheel spacer and front axle load of 2600 kg	
Plastic rear axle hubcaps (spare wheel with steel rim)	-4
Light alloy wheels 16" front axle with wheel spacer and increased front axle load of 2800 kg,	
Aluminium hubcaps on the rear axle (spare wheel with steel rim)	-4
Concorde steering wheel in leather	1
Concorde steering wheel in leather (removable)	2
Concorde multi-functional steering wheel in leather with access to Radio or optional navigations systems	3
Original Iveco air suspension on the rear axle with the function of "lifting and lowering" (not with luxury driver's cab seats)	25
Air suspension on the rear axle with the function of "lifting and lowering" (series in 920 G)	25
Air suspension in the front and rear axle, 4 channel system with "Auto Level" function (only with alloy wheels 16")	56
Air suspension in the front and rear axle, 4 channel system with "Auto Level" function (only with alloy wheels 16")	81
Fuel tank approx. 120 l (not for 920 G)	35

¹ Not available with 4 channel air suspension and luxury driver's cab suspension seats.

Chassis optional equipment

CHASSIS IVECO EUROCARGO

	EXCESS WEIGHT in kg
Tow bar with towable mass 3500 kg (only available with factory installation)	29
Tow bar with removable ball head (max. towable load 2500 kg)	33
Bi-LED headlamps in the front, fog lights with bending lights integrated under the bumper incl. daytime running lights LED	5
Differential lock for rear axle	15
Luxury driver's cab suspension seats, air sprung with lumbar support and heated seats	35
Hydraulic supports with automatic levelling	139
Concorde steering wheel in leather	1
Concorde multi-functional steering wheel in leather with access to radio or optional navigations systems	3
Automated 6 speed transmission Eurotronic (only 75E18)	15
Fuel tank 180 l (only 75E18)	70
Chassis variant 9000 kg	
90E25 (6 cylinder, 5.9 l, 184/250 kW/bhp, 850 Nm, towable mass 3500 kg)	430

CHASSIS MAN TGL

Tow bar with towable mass 3500 kg (only available with factory installation)	29
Tow bar with removable ball head (max. towable load 2500 kg)	33
Bi-LED headlamps in the front, fog lights with bending lights integrated under the bumper incl. daytime running lights LED	5
Differential lock for rear axle	15
Luxury driver's cab suspension seats, air sprung with lumbar support and heated seats	35
Hydraulic supports with automatic levelling	139
Concorde steering wheel in leather	1
Concorde multi-functional steering wheel in leather with access to Radio or optional navigations systems	3
Alloy wheels 17.5" with series tyres	-56
Engine variant 8.250 (6 cylinder, 6.9 l, 184 kw (250 bhp), 1000 Nm)	435

Body optional equipment

BODY

EXCESS WEIGHT
in kg

Side wall awning 5.5 m, with crank (850 L)	54
Side wall awning 5.5 m, electric (850 L)	58
Side wall awning 6.0 m, with crank (900 L, 900 LS, 900 M, 905 L, 920 G)	62
Side wall awning 6.0 m, electric (900 L, 900 LS, 900 M, 905 L, 920 G)	66
Central locking system for storage space flaps (without the skirting panel flaps and the gas box door)	5
Body door "Security" without number combination lock, remote control Interstop (gas pressure absorbers) instead	0
Rear garage floor with serrated aluminum sheet cover	20
Electrical sun blind in driver's cab for the front area	5

LIVING SPACE / SLEEPING AREA

CL-Lounge (4 people)	24
CL lounge with additional seatbelt place on the side sofa (5 person) (window on the side sofa 800 x 450 mm)	55
Bar version with adjustable single seat and multi function bench (includes 4 person allowance)	46
Bar version with adjustable single seat and CL lounge (includes 5 person allowance) (only 900 L)	70
Raised bed with electrical operation, individual bed supports, instead of front wall unit	62
Front blind for privacy (adjustable privacy shield from the bottom to the top)	4
Sliding doors between bathroom / kitchen / sleeping area with real wood veneer, in stead of cream-white	0
Midi-Heki instead of Mini-Heki (sleeping area)	6
Wrap-around sky light instead of Mini-Heki (sleeping area)	19
Lowerable table with upholstered chairs (not available with bar version)	8

KITCHEN

Solid work surface for kitchen, bathroom surfaces and living space table. Seamlessly moulded rinse and wash basin.	
Stainless steel hob, three rings with automatic ignition, glass cover and glass floor. Colour: golden leaf or blaze	20
Refrigerator 190 I instead of 160 I series refrigerator	6
Refrigerator 190 I / cooker combination with grill instead of 160 I series refrigerator	23
Stainless steel microwave with grill function under the hob, 230 V external port 17 l cooking area (not available with dishwasher)	22
Dishwasher under the hob (not available with stainless steel microwave)	25

Body optional equipment

ELECTRIC

EXCESS WEIGHT
in kg

Electric power packet 1

1 x Gel battery 165 Ah additional (total then 2 batteries) combi-charger 100 A with network strength code	68
Sinus inverter 12 V from 230 V, 4000 W top class and 2000 W continuous power with lack of network compensator (not for 920 G)	

Electric power packet 2

2 x Gel battery 165 Ah additional (total then 3 batteries) combi-charger 100 A, Sinus inverter from 12 V to 230 V, 5000 W top class and 2500 W continuous power with lack of network compensator (not for 920 G)	125
Alarm system with surveillance of the inner rooms, the garage flaps as well as the living space door	3
Gas generator 2600 W built in (only with gas tank)	50
Double reverse camera with shutter (screen above series radio)	4
Solar collector with approx 120 W maximal power	15
Solar collector with approx 2 x 120 W maximal power	30
Additional camera on the wing mirror, only on the passenger's side (screen above series radio)	1

TV / RADIO / TELEPHONE

Satellite TV set with 85 cm dish, fully automatic tuning, multiple user facilities through TWIN-LNB, port for the second receiver with 12 V / 230 V and antenna socket in sleeping area, sound reproduction through radio (vehicle height plus approx 120 mm)	
Satellite TV set 1 with LED flat screen 24" in entrance area	38
Satellite TV set 2 with LED flat screen 24" right in the wall unit, electrically lowerable	45
Satellite TV set 3 with LED flat screen 24" in wall unit above the windscreen, electronically lowerable (not with raised bed)	45
Internet satellite TV set with LED flat screen 24" in the entrance area, set with TV reception, GPS SKEW and internet access	38
Combination 230 V / 12 V / antenna / socket with cable routing in the floor. Position: in the external storage space on the left next to the body door (for optional TV external connection) (satellite exit)	1
Navigation system (with truck software and touchscreen 7.0", integrated radio with DVD, CD and MP3 playback, speaker phone for telephones with Bluetooth) and double reverse camera with shutter	4
LED flat screen 22" for rear sleeping area with integrated TV tuner	15
DVB-T antenna for reception of terrestrial digital TV	2
Sound system with 3 way speaker in driver's cab, vehicle specific audio crossover, 2 wide band speakers in the living space, double bass reflex sub-woofer, sound-processor	25

Body optional equipment

WATER / GAS / HEATING / BATHROOM

EXCESS WEIGHT
in kg

Exterior shower in the garage (driver's side)	2
Diesel pre heating "Motor Caravan" with comfortable continuous heating function (5200 W) incl. timer switch	10
Living space monitor gas alarm (carbon monoxide, propane, butane, anaesthetising gas)	2
Gas tank 120 l with remote gas switch, crash sensor and fill level indicator on the control panel display (not for 920 G)	104
Exterior gas socket on the passenger's side (gas withdrawal)	1
Roof air conditioning for living area 2400 W with heating element 1700 W (vehicle total height plus 120 mm)	34
Bathroom lower cupboard doors in real wood veneer, instead of cream-white	0
SOG toilet ventilation over the roof	1

UPHOLSTERY FABRIC / LEATHER / CARPET

Microfibre upholstery sandstone, ribbed look	Series	0
Microfibre upholstery cappuccino, ribbed look	Series	0
Leather upholstery sandstone, ribbed look		25
Leather upholstery mother-of-pearl, ribbed look		25
Leather upholstery tortora ribbed look		25
Leather upholstery stone grey ribbed look		25
Concorde collection: 2 x small cushion, 1 x large cushion, 2 x cosy blanket		8
Commercial floor covering Soft-walk. Colour: dark brown	at no extra cost	0
Linked and removable living space carpet. Colour: cream		10
Linked and removable living space carpet. Colour: mole		10


Concorde exclusively uses high-quality fabric and leather with a special stain resistance coating.

Mass in roadworthy condition comprises of: Driver (75 kg) filled fuel tank, 100 l fresh water in Iveco Daily, Iveco Eurocargo and MAN TGL chassis, 1 x filled 11 kg steel gas cylinder, tools and spare wheel.
Through the installation of standard equipment and fixtures, unladen weight and measurements may alter. All mass and weight information is correct the at time of printing. Deviation of +/- 5% is possible and permissible.

Sectional drawing

THE CABIN CONSTRUCTION OF CONCORDE CHARISMA

In campervan construction, Concorde stands for perfect insulation and outstanding stability. This is chiefly down to the lack of thermal loss, completely sealed solid-therm cabin construction with polyurethane ridged foam ledges as well as the insulation of the side walls with 38 millimeter strong RTM foam. And as if that weren't enough: Also the under and in-between floors are finished in a sandwich type construction and filled with altogether 70 millimetres of insulation. The side skirting panels, bumpers as well as the front and rear parts are made from highly stable and nonetheless elastic fiberglass composite material. The very glossy and completely flush wall surfaces made from Aluminium sandwich construction make for a car-like impression. Aluminium roof profile ledges with rainwater flow channels reduce the telling sidewall staining. 10-year water ingress warranty on the body against ingress of moisture from the outside with annual inspection in accordance with the Concorde warranty conditions.

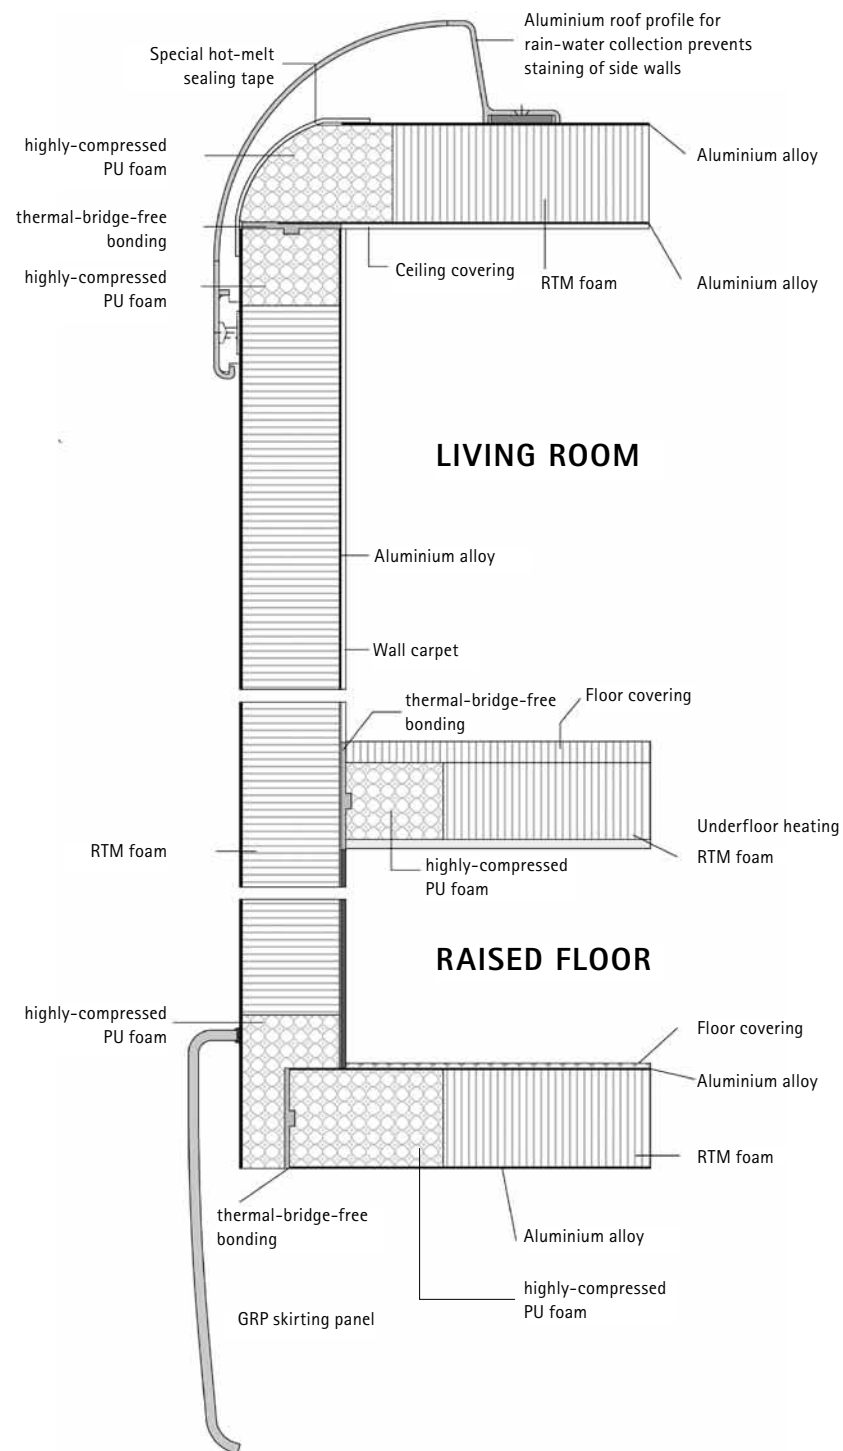

Technical modifications reserved provided that the overall product quality remains the same or is improved and the intended purpose is not impaired. On publication of this technical information, all previous are rendered invalid. Subject to change without notice, errors excepted.

Concorde

REISEMOBILE AUS LEIDENSCHAFT

Concorde Reisemobile GmbH
Concorde-Straße 2-4, D-96132 Schlüsselfeld-Aschbach
Tel.: +49 (0) 9555 9225-0, Fax: +49 (0) 9555 9225-44
Web: www.concorde.eu, E-Mail: info@concorde.eu